




# Cut-In Speaker (pair) CC2PKCI7LS

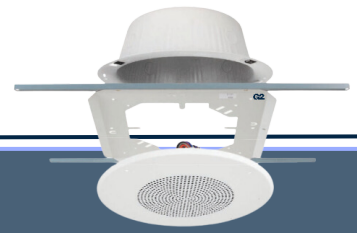

## Audio Performance

<b>Average Sensitivity:</b>	95dB SPL, 1W/1M
<b>Loudspeaker Power Rating:</b>	20W RMS, EIA 426A Standard
<b>Calculated Output:</b>	102dB SPL, 5W/1M
<b>Magnet Type and Weight:</b>	BeFe Ceramic, 10 oz. Nominal
<b>Frequency Response:</b>	65Hz - 17kHz, EIA 426A Standard
<b>Nominal Coverage Angle:</b>	90° Included Angle, -6dB/2kHz, Half Space
<b>Audio Connection:</b>	7", Color-coded, Pre-tinned Leads

## Component

<b>Transformer:</b>	TBLU: 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5W)
<b>Loudspeaker Specs:</b>	8" O.D. loudspeaker, 10 oz. magnet
<b>Finish:</b>	White powder coat finish on baffle
<b>Mounting Support Dimensions:</b>	23 3/4" x 14 3/8" x 9/16"
<b>Baffle Dimension:</b>	12 7/8" (Diameter) x 5/16" (H)
<b>Backbox Dimension:</b>	12 5/16" (Diameter) x 4 1/4" (H)
<b>Weight:</b>	15lbs

## Application

<b>Intended Use:</b>	Indoor environment
<b>Program Material:</b>	Signal tones, voice and music
<b>Installation:</b>	Downward-firing in a 24" wide, drop-tile ceiling